





VOORAANZICHT - VUE FRONTALE  
VORDERANSICHT - FRONT VIEW

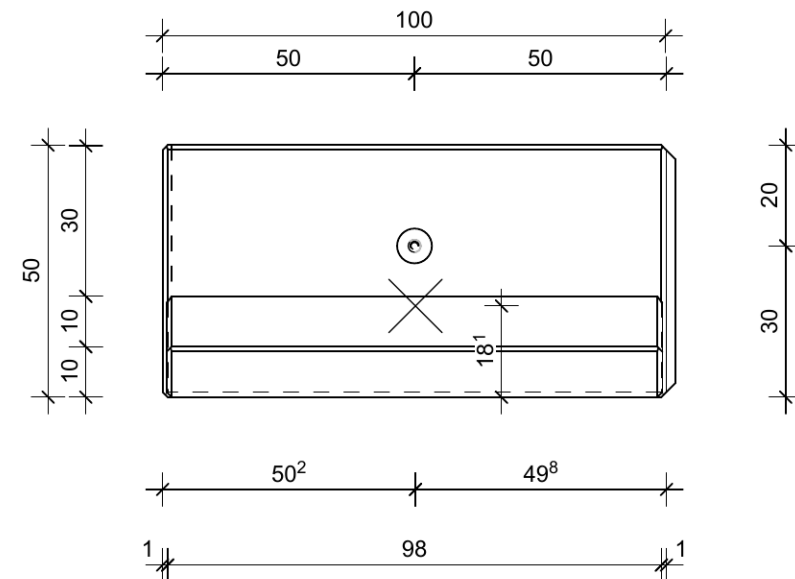

BOVENAANZICHT - VUE SUPERIEURE  
DRAUFSICHT - TOP VIEW

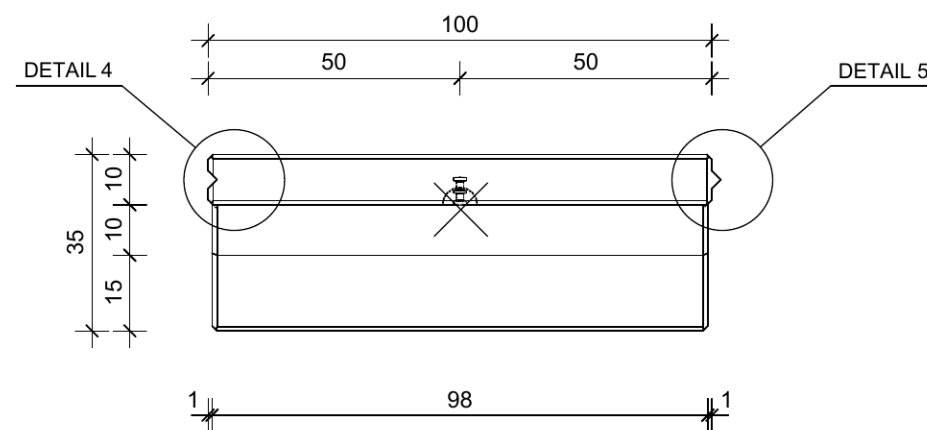

DOORSNEDE - COUPE TRANSVERSALE  
QUERSCHNITT - CROSS SECTION

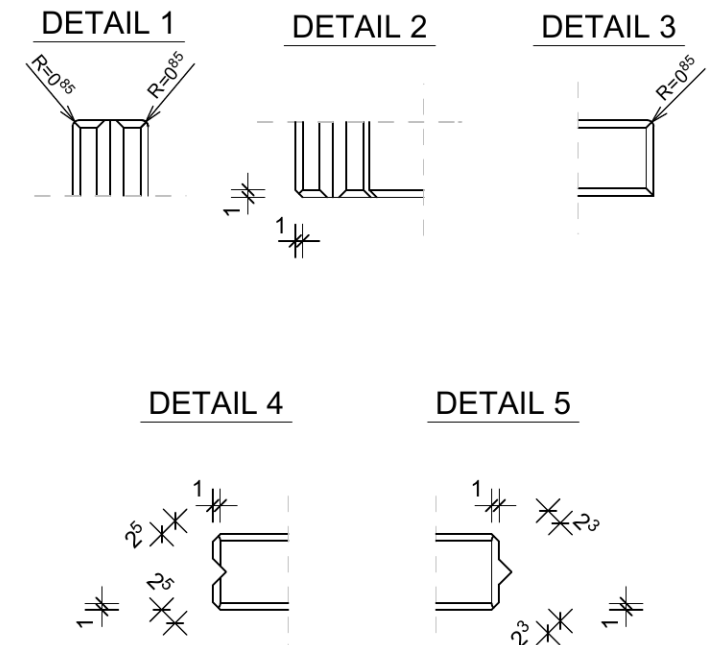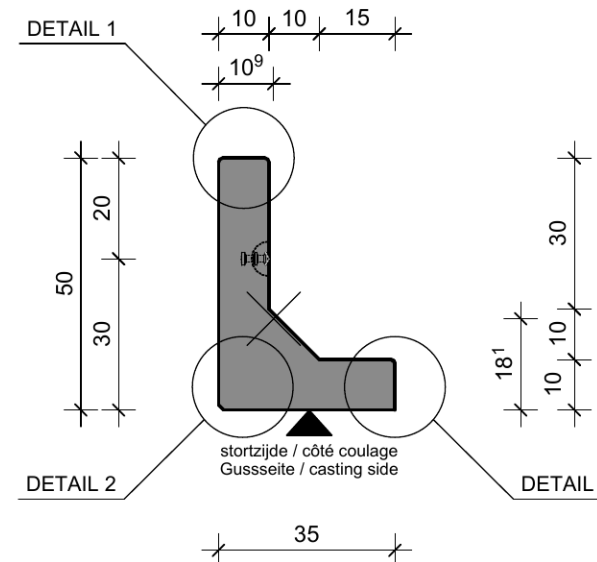

TECHNISCHE FICHE / FICHE TECHNIQUE  
TECHNISCHE DATEN / TECHNICAL DATA


element / élément / Element / element

CLF10GS 50x100

|                                                                                                                        |                                                                            |                                                             |                   |
|------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|-------------------------------------------------------------|-------------------|
| sterkteklasse / classe de résistance<br>Festigkeitsklasse / strength class                                             | C60/75                                                                     | artikelnr. / numéro d'article<br>Artikelnr. / item number   | 11983             |
| constructieklasse / classe structurale<br>Bauklasse / structural class                                                 | S1                                                                         | versie / version<br>Version / version                       | 20250416          |
| betondekking / enrobage de béton<br>Betondeckung / concrete cover                                                      | 30mm                                                                       | productie / production<br>Herstellung / production          | Emmen             |
| milieuklasse / classe d'exposition<br>Expositionsklasse / exposure class<br>(EN 206)                                   | B / NL: XC4, XD3, XS3, XF4*<br>F / UK: XC4, XD1, XS1, XF3*<br>D: XC4, XF3* | volume / volume<br>Volumen / volume                         | 0.0793 m³         |
| omgevingsklasse / classe d'environnement<br>Umgebungsklasse / environmental class<br>(NBN B15-001)                     | EE4/ES4*                                                                   | gewicht / poids<br>Gewicht / weight                         | 195 kg            |
| staalkwaliteit / qualité de l'acier<br>Stahlqualität / steel quality                                                   | B500B*                                                                     | ankers / ancrés<br>Anker / anchors                          | KKA: 1x 2.5T-55mm |
| toelaatbare maatafwijking / écart dimensionnel admissible<br>zulässige Maßabweichung / allowable dimensional deviation | +5mm/-5mm                                                                  | hijshaken / anneaux de levage<br>Kupplungen / lifting links | 1x HEFH KKA 2.5   |
| stortzijde / côté coulage<br>Gussseite / casting side                                                                  | afgestreken / tiré à la règle<br>abgestrichen / levelled                   |                                                             |                   |
| betonafmetingen / dimensions de béton<br>Betonabmessungen / concrete dimensions                                        | cm                                                                         |                                                             |                   |
| andere afmetingen / autres dimensions<br>andere Abmessungen / other dimensions                                         | mm                                                                         |                                                             |                   |

andere klassen op aanvraag / autres classes sur demande / other classes on request / andere Klassen auf Anfrage

bovenbelasting / surcharge / Auflast / surcharge

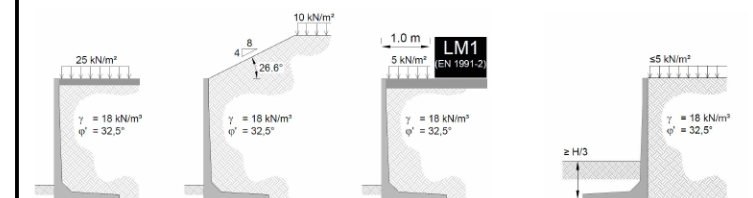

L (cm) minimale kettinglengte / longueur minimale des chaînes  
minimale Kettenlänge / minimum chain length

