




VORDERANSICHT - FRONT VIEW

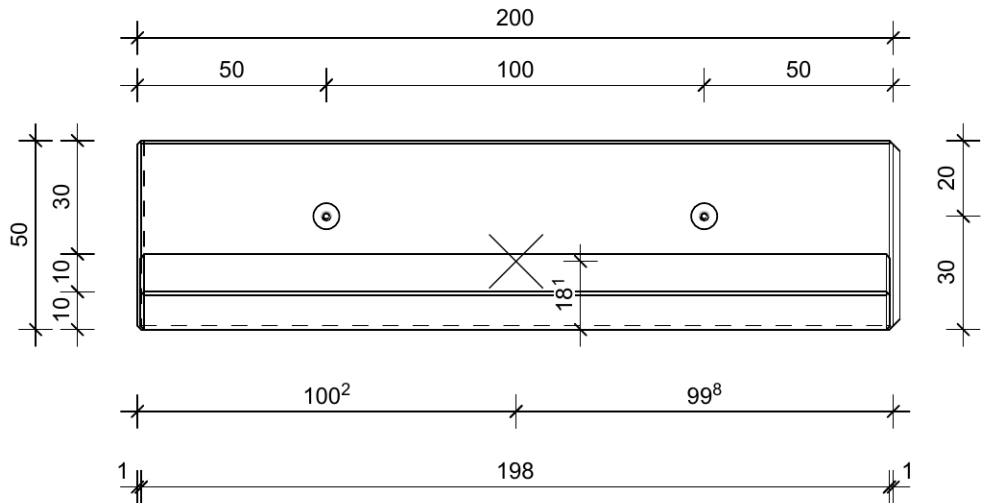


DRAUFSICHT - TOP VIEW

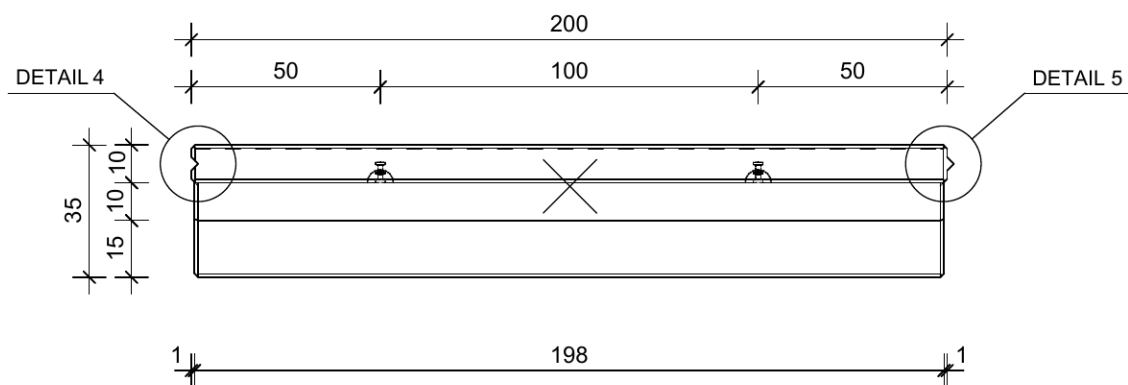


QUERSCHNITT - CROSS SECTION

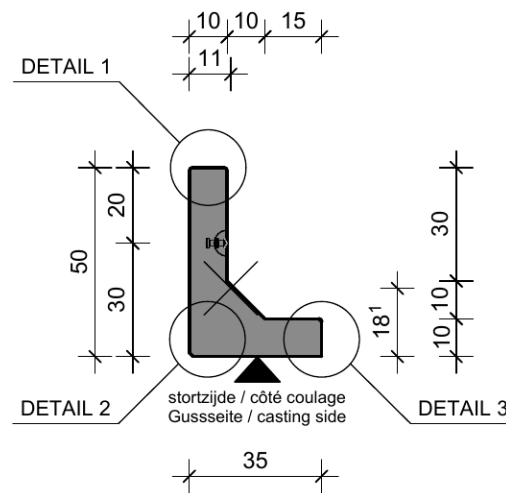

HEBEANLEITUNG - LIFTING INSTRUCTIONS

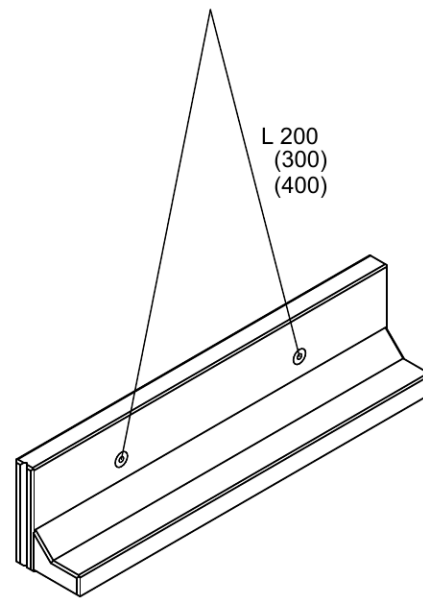

L (cm) *minimale kettinglengte / longueur minimale des chaînes*
minimale Kettenlänge / minimum chain length

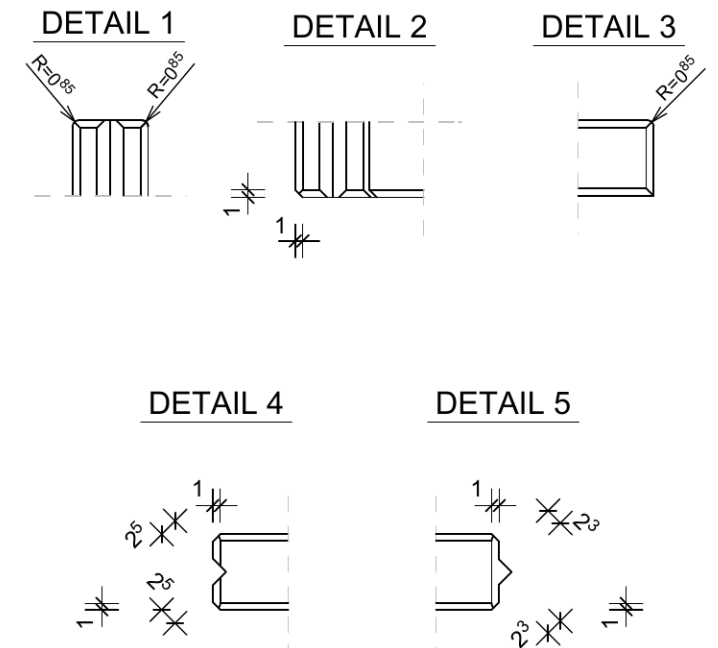

TECHNISCHE DATEN / TECHNICAL DATA

element / élément / Element / element

CLF10GS 50x200

startteklasse / classe de résistance Festigkeitsklasse / strength class	C60/75	artikelnr. / numéro d'article Artikelnr. / item number	11591
constructieklasse / classe structurale Bauklasse / structural class	S1	versie / version Version / version	20250416
betondekking / enrobage de béton Betondeckung / concrete cover	30mm	productie / production Herstelling / production	Emmen
milieuklasse / classe d'exposition Expositionsklasse / exposure class (EN 206)	B / NL: XC4, XD3, XS3, XF4* F / UK: XC4, XD1, XS1, XF3* D: XC4, XF3*	volume / volume Volumen / volume	0.1592 m³
omgevingsklasse / classe d'environnement Umgebungsklasse / environmental class (BNB B15-001)	EE4/ES4*	gewicht / poids Gewicht / weight	385 kg
staalkwaliteit / qualité de l'acier Stahlkwalität / steel quality	B500B*	ankers / ancres Anker / anchors	KKA: 2x 2.5T-55mm
toelaatbare maatafwijking / écart dimensionnel admissible zulässige Maßabweichung / allowable dimensional deviation	+5mm/-5mm	hįshaken / anneau de levage Kupplungen / lifting links	2x HEFH KKA 2.5
stortzjide / côté coulage Gusseite / casting side	afgestreken / tiré à la règle abgestrichen / levelled		
betonaafmetingen / dimensions de béton Betonabmessungen / concrete dimensions	cm		
andere afmetingen / autres dimensions andere Abmessungen / other dimensions	mm		

* andere klassen op aanvraag / autres classes sur demande / other classes on request / andere Klassen auf Anfrage

